


形名	社名	最大定格										順方向特性			逆方向特性			その他の特性等	外形
		V <sub>RSM</sub>	V <sub>RRM</sub>	V <sub>R</sub>	I <sub>FM</sub>	T条件	I <sub>o, I<sub>FM</sub></sub>	T条件	I <sub>FSM</sub>	T条件	V <sub>Fmax</sub>	測定条件		I <sub>rmax</sub>	測定条件				
		(V)	(V)	(V)	(A)	(°C)	(A)	(°C)	(A)	(°C)	(V)	I <sub>F</sub> (A)	T(°C)	(μA)	V <sub>R</sub> (V)	T(°C)			
DFS250AR13	日立	1600	1300				250	38c	5000		1.8	780	25c	40mA	1300	125c	DFS250A13と逆極性	162	
DFS250AR15	日立	1800	1500				250	38c	5000		1.8	780	25c	40mA	1500	125c	DFS250A15と逆極性	162	
DFS250AR8	日立	1000	800				250	38c	5000		1.8	780	25c	40mA	800	120c	DFS250A8と逆極性	162	
DG20AA-120	三社電機	1300	1200				20	76c	410	25j	1.65	65	25j	8mA	1200	25j		708	
DG20AA-160	三社電機	1700	1600				20	76c	410	25j	1.65	65	25j	8mA	1600	25j		708	
DG20AA-40	三社電機	480	400				20	76c	410	25j	1.65	65	25j	8mA	400	25j		708	
DG20AA-80	三社電機	960	800				20	76c	410	25j	1.65	65	25j	8mA	800	25j		708	
DLA11C	三洋		200				1.1	30			0.98	1.1		10	200		trr<50ns, loは7μm基板実装	485B	
DLE30B	三洋		100				1.5	29a	60		0.98	3		10	100		trr<35ns	90K	
DLE30C	三洋		200				1.5	29a	60		0.98	3		10	200		trr<35ns	90K	
DLE30E	三洋		400				1.5	29a	60		1.25	1		20	400		trr<30ns	90K	
DLM10B	三洋		100				1	57a	30		0.98	1		10	100		trr<35ns, loリード長8, プリットランド 10X10mm	602	
DLM10C	三洋		200				1	57a	30		0.98	1		10	200		trr<35ns, loリード長8, プリットランド 10X10mm	602	
DLM10E	三洋		400				1	57a	30		1.25	1		20	400		trr<30ns, loリード長8, プリットランド 10X10mm	602	
DS19C	日立	300	200				20	98c	400		1.2	60	25c	2mA	200	25c	D20Cと逆極性	751	
DS19E	日立	500	400				20	98c	400		1.2	60	25c	2mA	400	25c	D20Eと逆極性	751	
DS19G	日立	800	600				20	98c	400		1.2	60	25c	2mA	600	25c	D20Gと逆極性	751	
DS19J	日立	1000	800				20	98c	400		1.2	60	25c	2mA	800	25c	D20Jと逆極性	751	
DS19L	日立	1200	1000				20	98c	400		1.2	60	25c	2mA	1000	25c	DS20Lと逆極性	751	
DS20C	日立	300	200				20	98c	400		1.2	60	25c	2mA	200	25c		751	
DS20E	日立	500	400				20	98c	400		1.2	60	25c	2mA	400	25c		751	
DS20G	日立	800	600				20	98c	400		1.2	60	25c	2mA	600	25c		751	
DS20J	日立	1000	800				20	98c	400		1.2	60	25c	2mA	800	25c		751	
DS20L	日立	1200	1000				20	98c	400		1.2	60	25c	2mA	1000	25c		751	
DS130TA	三洋		800	560	15		1	60a	50		1	1		10	800			89F	
DS130TB	三洋		600	420	15		1	60a	50		1	1		10	600			89F	
DS130TC	三洋		400	280	15		1	60a	50		1	1		10	400			89F	
DS130TD	三洋		200	140	15		1	60a	50		1	1		10	200			89F	
DS130TE	三洋		100	70	15		1	60a	50		1	1		10	100			89F	
DS135C	三洋		400	280	15		1	60a	50		1	1		10	400			20B	
DS135D	三洋		200	140	15		1	60a	50		1	1		10	200			20B	
DS135E	三洋		100	70	15		1	60a	50		1	1		10	100			20B	
DS150A	三洋		200	140			1.5	60a	100		0.93	1.5		10	200			259D	
DS150B	三洋		400	280			1.5	60a	100		0.93	1.5		10	400			259D	
DS150C	三洋		600	420			1.5	60a	100		0.93	1.5		10	600			259D	
DSA1A1	日立	100					1	50L	45	150j	1.2	1	25L	20	100			112D	
DSA1A2	日立	200					1	50L	45	150j	1.2	1	25L	20	200			112D	
DSA1A4	日立	400					1	50L	45	150j	1.2	1	25L	5	400			112D	
DSA10G	三洋	600					1	30			1.2	1		10	600			20B	
DSA10J	三洋	800					1	30			1.2	1		10	800			20B	
DSA10L	三洋	1000					1	30			1.2	1		10	1000			20B	
DSA12B	三洋	100					1.2	60a	110		1	1.2		10	100			89F	
DSA12C	三洋	200					1.2	60a	110		1	1.2		10	200			89F	
DSA12E	三洋	400					1.2	60a	110		1	1.2		10	400			89F	
DSA12G	三洋	600					1.2	60a	110		1	1.2		10	600			89F	

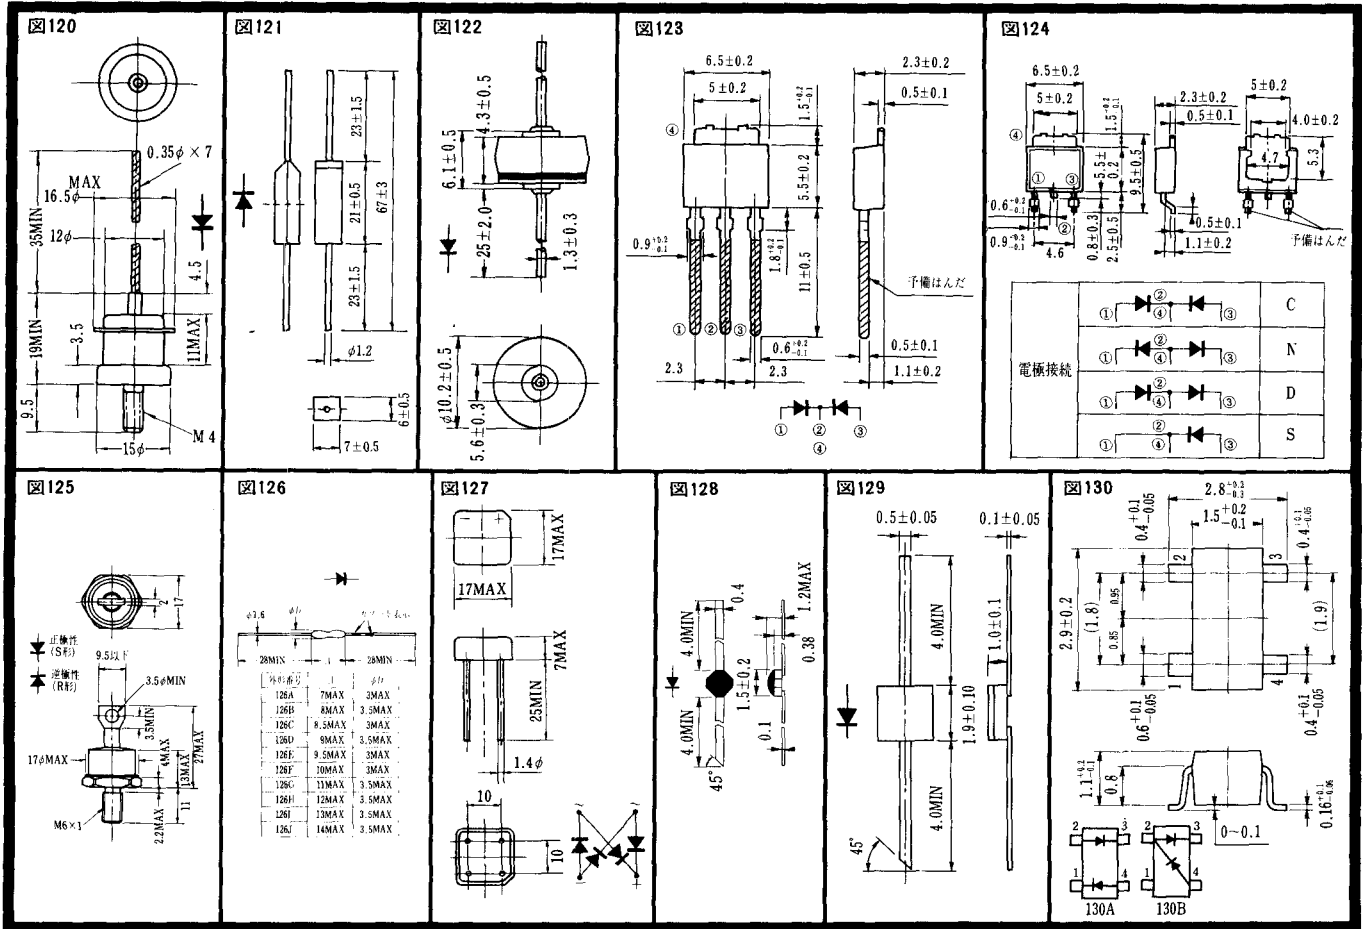

〈寸法図単位：mm〉