

# 05Z5.1 ~ 05Z24

Silicon Planar Type

Zener Diode

CONSTANT VOLTAGE REGULATION APPLICATIONS.  
REFERENCE VOLTAGE APPLICATIONS.

**FEATURES:**

- High Power Voltage : P=500mW
- Nominal Voltage Tolerance About  $\pm 6\%$  and About  $\pm 2.5\%$  (X, Y, Z).
- Hermetically Sealed Miniature Glass Package.
- High Reliability.

**MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ )**



CHARACTERISTIC	SYMBOL	RATING	UNIT
Power Dissipation	P	500	mW
Surge Power Dissipation (Note 1)	PZSM	1250	mW
Maximum(Peak) Zener Current	I <sub>ZM</sub>	(Note 2)	mA
Junction Temperature	T <sub>J</sub>	175	$^\circ\text{C}$
Storage Temperature Range	T <sub>stg</sub>	-65 ~ 175	$^\circ\text{C}$

Note 1 : Allowable peak power for surge pulse of 1 second.

2 : See ELECTRICAL CHARACTERISTICS.

3 : Marking

Example : 05Z5.6-Y

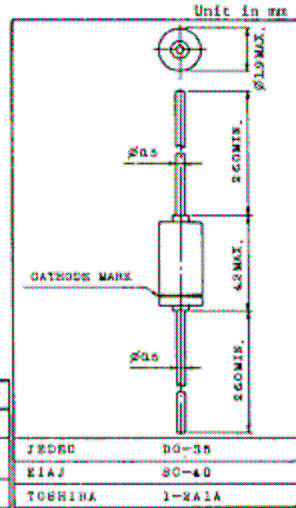

**ELECTRICAL CHARACTERISTICS ( $T_a=25^\circ\text{C}$ )**

TYPE	CLASSIFICATION(1)	ZENER VOLTAGE CLASSIFICATION(2)		ZENER IMPEDANCE $r_d$ (Note 5) ( $\Omega$ )	TEMPERATURE COEFFICIENT OF ZENER VOLTAGE $r_z$ ( $\%/^\circ\text{C}$ )		ZENER CURRENT $I_z$ (mA)	REVERSE CURRENT $I_R$ ( $\mu\text{A}$ )	REVERSE VOLTAGE $V_R$ (V)	MAXIMUM (PEAK) ZENER CURRENT (Note 2) $I_{ZM}$ (mA)	
		$V_z$ (V)									
		MIN.	MAX.		TYP.	MAX.					
05Z5.1	X										
	Y	4.8	5.4	15	50	0.030	0.050	5	1	1	86
	Z										
05Z5.6	X										
	Y	5.3	6.0	4	30	0.032	0.050	5	1	2	82
	Z										
05Z6.2	X										
	Y	5.8	6.6	5	17	0.042	0.060	5	1	3	76
	Z										
05Z6.8	X										
	Y	6.4	7.2	7	15	0.048	0.065	5	1	5	68
	Z										
05Z7.5	X										
	Y	7.1	7.9	8	15	0.055	0.070	5	1	6	62
	Z										
05Z8.2	X										
	Y	7.7	8.7	10	20	0.060	0.077	5	1	6.5	56
	Z										
05Z9.1	X										
	Y	8.6	9.6	10	20	0.065	0.081	5	0.5	7	52
	Z										
05Z10	X										
	Y	9.4	10.6	15	25	0.070	0.085	5	0.5	8	46
	Z										
05Z11	X										
	Y	10.4	11.6	20	30	0.074	0.088	5	0.5	8.5	42
	Z										

TYPE	ZENER VOLTAGE				ZENER IMPEDANCE $r_d$ (Note 5)		TEMPERATURE COEFFICIENT OF ZENER VOLTAGE $r_Z$ (%/°C)		ZENER CURRENT $I_Z$ (mA)	REVERSE CURRENT $I_R$ (μA)	REVERSE VOLTAGE $V_R$ (V)	MAXIMUM (PEAK) ZENER CURRENT (Note 2) $I_{ZM}$ (mA)	
	CLASSIFICATION(1)		CLASSIFICATION(2)										
	$V_Z$ (V)				TYP.		TYP.		MAX.	MAX.	MAX.	MAX.	
	MIN.	MAX.	MIN.	MAX.									
05Z12	X			11.40	11.95	20	30	0.077	0.090	5	0.5	9	38
	Y	11.4	12.6	11.70	12.25								
	Z			12.05	12.60								
05Z13	X			12.40	13.10	25	35	0.080	0.092	5	0.5	10	34
	Y	12.4	14.1	12.90	13.60								
	Z			13.40	14.10								
05Z15	X			13.90	14.65	25	35	0.084	0.095	5	0.5	11	30
	Y	13.9	15.6	14.40	15.15								
	Z			14.85	15.60								
05Z16	X			15.40	16.15	30	40	0.087	0.097	5	0.5	12	28
	Y	15.4	17.1	15.90	16.65								
	Z			16.35	17.10								
05Z18	X			16.90	17.80	30	40	0.092	0.099	5	0.5	14	24
	Y	16.9	19.1	17.55	18.45								
	Z			18.20	19.10								
05Z20	X			18.80	19.80	38	50	0.094	0.100	5	0.5	15	22
	Y	18.8	21.2	19.50	20.50								
	Z			20.20	21.20								
05Z22	X			20.80	21.80	45	60	0.096	0.105	5	0.5	17	20
	Y	20.8	23.3	21.50	22.50								
	Z			22.30	23.30								
05Z24	X			22.80	24.00	50	70	0.098	0.110	5	0.5	18	18
	Y	22.8	25.6	23.50	24.70								
	Z			24.40	25.60								

Note 4 : Test time :  $t=100\mu s$

5 : Test frequency :  $f=1kHz$

