

# HD74HC241

Octal Buffers/Line Drivers/Line Receivers  
(with noninverted 3-state outputs)

**HITACHI**

## Description

The HD74HC241 is a noninverting buffer and has one active low enable and one active high enable. Each enable independently controls 4 buffers.

This device does not have schmitt trigger inputs.

## Features

- High Speed Operation:  $t_{pd} = 11 \text{ ns typ}$  ( $C_L = 50 \text{ pF}$ )
- High Output Current: Fanout of 15 LSTTL Loads
- Wide Operating Voltage:  $V_{CC} = 2 \text{ to } 6 \text{ V}$
- Low Input Current:  $1 \mu\text{A max}$
- Low Quiescent Supply Current:  $I_{CC} (\text{static}) = 4 \mu\text{A max}$  ( $T_a = 25^\circ\text{C}$ )

## Function Table

Inputs			Output
1G	2G	A	Y
H	L	X	Z
L	H	H	H
L	H	L	L


H : high level

L : low level

X : irrelevant

Z : off (high-impedance) state of a 3-state output

## Pin Arrangement

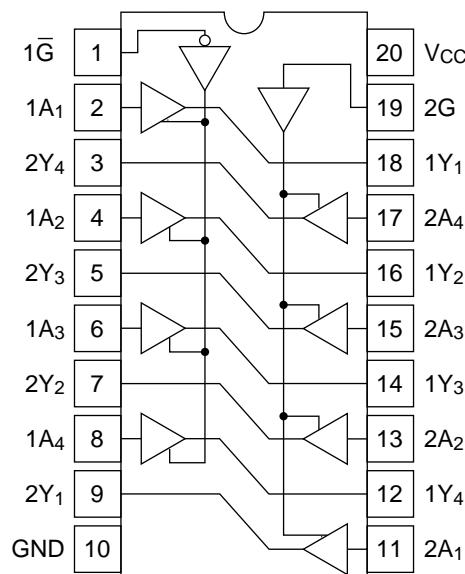


(Top view)

## Absolute Maximum Ratings

Item	Symbol	Rating	Unit
Supply voltage range	$V_{CC}$	-0.5 to +7.0	V
Input voltage	$V_{IN}$	-0.5 to $V_{CC} + 0.5$	V
Output voltage	$V_{OUT}$	-0.5 to $V_{CC} + 0.5$	V
DC current drain per pin	$I_{OUT}$	$\pm 35$	mA
DC current drain per $V_{CC}$ , GND	$I_{CC}, I_{GND}$	$\pm 75$	mA
DC input diode current	$I_{IK}$	$\pm 20$	mA
DC output diode current	$I_{OK}$	$\pm 20$	mA
Power dissipation per package	$P_T$	500	mW
Storage temperature	Tstg	-65 to +150	°C

## Logic Diagram

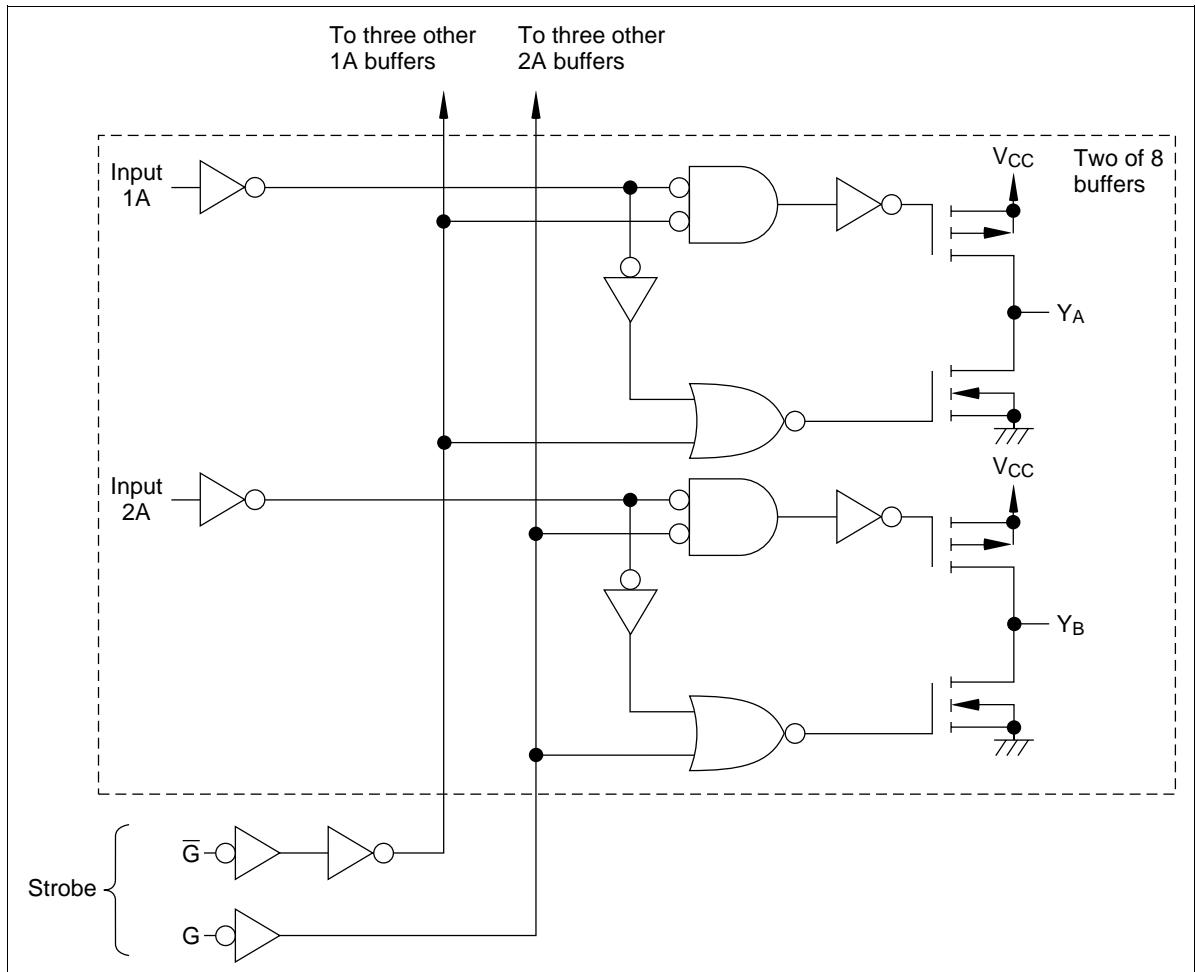




## DC Characteristics

Item	Symbol	V <sub>cc</sub> (V)	Ta = 25°C				Unit	Test Conditions
			Min	Typ	Max	Min		
Input voltage	V <sub>IH</sub>	2.0	1.5	—	—	1.5	—	V
		4.5	3.15	—	—	3.15	—	
		6.0	4.2	—	—	4.2	—	
	V <sub>IL</sub>	2.0	—	—	0.5	—	0.5	V
		4.5	—	—	1.35	—	1.35	
		6.0	—	—	1.8	—	1.8	
Output voltage	V <sub>OH</sub>	2.0	1.9	2.0	—	1.9	—	V
		4.5	4.4	4.5	—	4.4	—	
		6.0	5.9	6.0	—	5.9	—	
		4.5	4.18	—	—	4.13	—	I <sub>OH</sub> = -6 mA
		6.0	5.68	—	—	5.63	—	I <sub>OH</sub> = -7.8 mA
	V <sub>OL</sub>	2.0	—	0.0	0.1	—	0.1	V
		4.5	—	0.0	0.1	—	0.1	
		6.0	—	0.0	0.1	—	0.1	
		4.5	—	—	0.26	—	0.33	I <sub>OL</sub> = 6 mA
		6.0	—	—	0.26	—	0.33	I <sub>OL</sub> = 7.8 mA
Off-state output current	I <sub>OZ</sub>	6.0	—	—	±0.5	—	±5.0	μA
Input current	I <sub>IN</sub>	6.0	—	—	±0.1	—	±1.0	μA
Quiescent supply current	I <sub>CC</sub>	6.0	—	—	4.0	—	40	μA
								Vin = V <sub>cc</sub> or GND, Iout = 0 μA

AC Characteristics ( $C_L = 50 \text{ pF}$ , Input  $t_r = t_f = 6 \text{ ns}$ )

Item	Symbol	$V_{cc} (\text{V})$	Ta = -40 to +85°C					Unit	Test Conditions
			Min	Typ	Max	Min	Max		
			—	—	—	—	—		
Propagation delay time	$t_{PHL}$	2.0	—	—	90	—	115	ns	
		4.5	—	12	18	—	23		
		6.0	—	—	15	—	20		
	$t_{PLH}$	2.0	—	—	90	—	115	ns	
		4.5	—	10	18	—	23		
		6.0	—	—	15	—	20		
	$t_{ZL}$	2.0	—	—	150	—	190	ns	
		4.5	—	11	30	—	38		
		6.0	—	—	26	—	33		
	$t_{ZH}$	2.0	—	—	150	—	190	ns	
		4.5	—	12	30	—	38		
		6.0	—	—	26	—	33		
Output disable time	$t_{LZ}$	2.0	—	—	150	—	190	ns	
		4.5	—	16	30	—	38		
		6.0	—	—	26	—	33		
	$t_{HZ}$	2.0	—	—	150	—	190	ns	
		4.5	—	19	30	—	38		
		6.0	—	—	26	—	33		
Output rise/fall time	$t_{TLH}$	2.0	—	—	60	—	75	ns	
	$t_{THL}$	4.5	—	4	12	—	15		
		6.0	—	—	10	—	13		
Input capacitance	$C_{in}$	—	—	5	10	—	10	pF	

Unit: mm

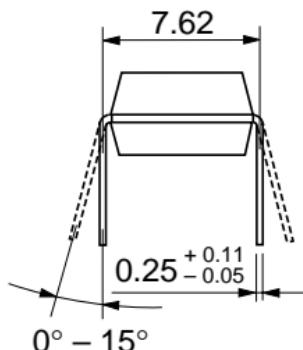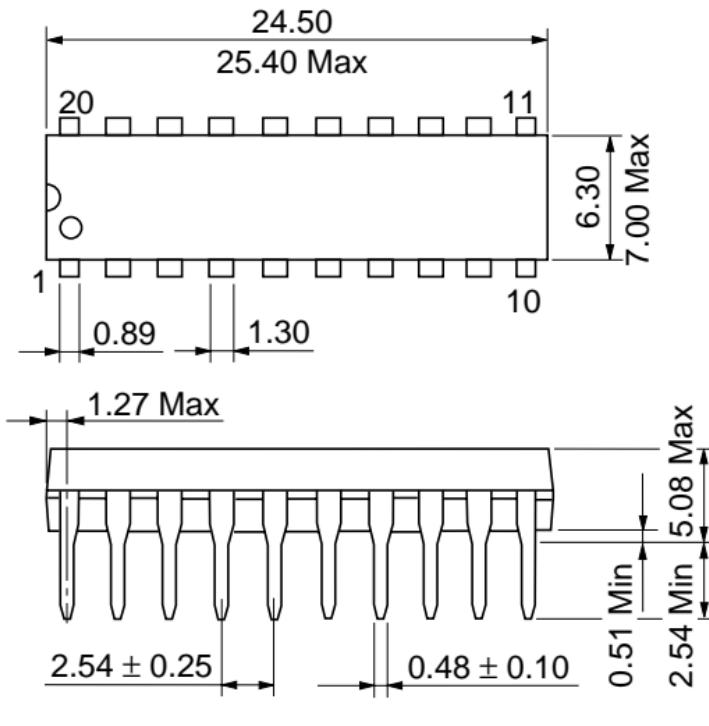

Hitachi Code	DP-20N
JEDEC	—
EIAJ	Conforms
Weight (reference value)	1.26 g