



昌隆科技股份有限公司

GO FORWARD ENTERPRISE CORP.



## ADAPTER-12W

# NP12-1S<sub>TYPE</sub>

### DESCRIPTION:

- U.S.A / JAPAN / TAIWAN
- Wall Mount Type
- Meet CEC Regulations
- ROHS Compliance
- No Load Power Consumption  
Less than 0.3W


**Green Mode**

### MEET SAFETY:



### GENERAL SPECIFICATIONS:

Maximum Output Power:	12W
Input Voltage:	90~132Vac
Input Frequency:	47Hz~63Hz
Input Current:	0.28A
Leakage Current (max):	0.25mA
Efficiency:	80%
Ripple Noise (max):	150mVp-p
Line Regulation:	±1%
Load Regulation:	±5%
Hold-Up Time:	10mS
Over Voltage Protection:	120%
Operating Temperature:	0~40°C
Ambient Humidity (operating):	20~90%RH
Storage Temperature:	-20~80°C
Storage Humidity:	10~95%RH
Withstand Voltage:	3Kv/min
Weight:	95g
Cable Type:	UL2468/18AWG or 20AWG

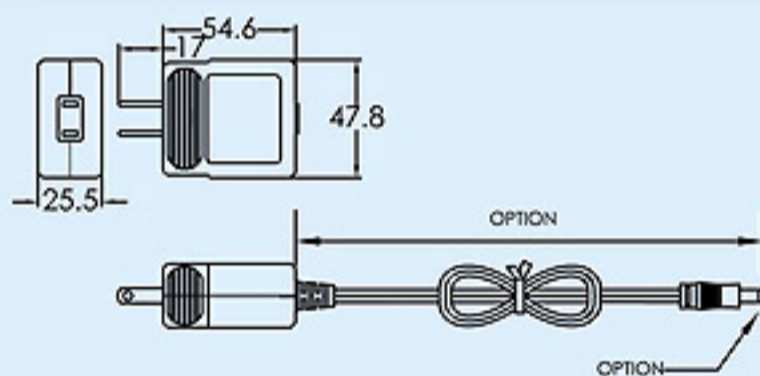

### Dimensions:

LxWxH: 54.6x47.8x25.5 (mm)

Model	INPUT	OUTPUT
NP12-IS0320	90-132VAC (47-63HZ)	3V 2A
NP12-IS03320		3.3V 2A
NP12-IS0523		5V 2.3A
NP12-IS0620		6V 2A
NP12-IS0716		7V 1.6A
NP12-IS07515		7.5V 1.5A
NP12-IS0912		9V 1.2A
NP12-IS1210		12V 1A
NP12-IS1208		12V 0.8A
NP12-IS1508		15V 0.8A
NP12-IS2405		24V 0.5A