

# Inductors

## For Power Line SMD

## SLF Series SLF7032 Type

### FEATURES

- The SLF series are characterized by low profile, low DC resistance, and high current handling capacities.
- Because they are magnetically shielded, these parts can be used in high-density mounting configurations.
- Flat bottom surface ensures secure, reliable mounting.
- Provided in embossed carrier tape packaging for use with automatic mounting machines.


### APPLICATIONS

Portable telephones, personal computers, hard disk drives, and other electronic equipment.

### SPECIFICATIONS

Type	Operating temperature range [Including self-temperature rise]	Storage temperature range [Unit of products]
SLF6025	-20 to +85°C	-40 to +85°C
SLF6028	-20 to +85°C	-40 to +85°C
SLF7028	-20 to +85°C	-40 to +85°C
SLF7030	-20 to +85°C	-40 to +85°C
SLF7032	-20 to +85°C	-40 to +85°C
SLF7045	-20 to +85°C	-40 to +85°C
SLF10145	-20 to +90°C	-40 to +90°C
SLF12555	-20 to +90°C	-40 to +90°C
SLF12565	-20 to +105°C	-40 to +105°C
SLF12575	-20 to +105°C	-40 to +105°C

### RECOMMENDED REFLOW SOLDERING CONDITIONS

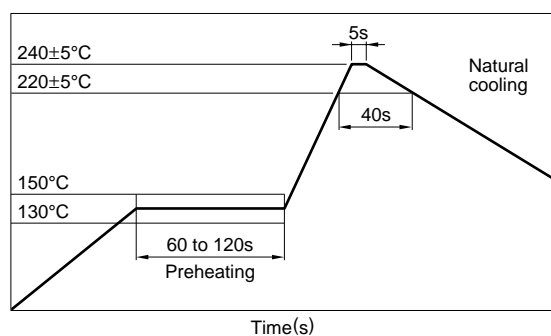

### PRODUCT IDENTIFICATION

SLF	7032	T	220	M	R96	-2
(1)	(2)	(3)	(4)	(5)	(6)	(7)

(1) Series name

(2) Dimensions L×W×T

6025	6.0×6.0×2.5mm
6028	6.0×6.0×2.8mm
7028	7.0×7.0×2.8mm
7030	7.0×7.0×3.0mm
7032	7.0×7.0×3.2mm
7045	7.0×7.0×4.5mm
10145	10.1×10.1×4.5mm
12555	12.5×12.5×5.5mm
12565	12.5×12.5×6.5mm
12575	12.5×12.5×7.5mm

(3) Packaging style

T	Taping(reel)
---	--------------

(4) Inductance value

3R3	3.3μH
100	10μH

(5) Inductance tolerance

M	±20%
N	±30%

(6) Rated current

1R9	1.9A
R96	0.96A

(7) TDK internal code

(Some products may not have this number. See the main body for details.)

### PACKAGING STYLE AND QUANTITIES

Packaging style	Type	Quantity
Taping	SLF6025T	1000 pieces/reel
	SLF6028T	1000 pieces/reel
	SLF7028T	1000 pieces/reel
	SLF7030T	1000 pieces/reel
	SLF7032T	1000 pieces/reel
	SLF7045T	1000 pieces/reel
	SLF10145T	500 pieces/reel
	SLF12555T	500 pieces/reel
	SLF12565T	500 pieces/reel
	SLF12575T	500 pieces/reel


# Inductors

## For Power Line

### SMD

## SLF Series SLF7032 Type

### SHAPES AND DIMENSIONS/RECOMMENDED PC BOARD PATTERN

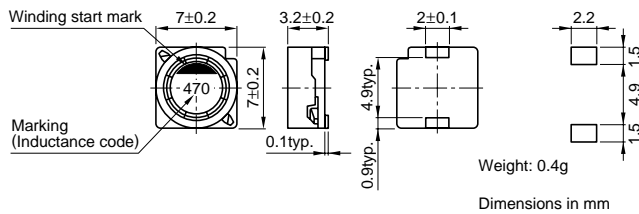

### ELECTRICAL CHARACTERISTICS

Inductance (μH)	Inductance tolerance (%)	Test frequency L (kHz)	DC resistance (Ω)±20%	Rated current (A)max.	Part No.
3.3	±20	1	0.023	1.9	SLF7032T-3R3M1R9-2
4.7	±20	1	0.036	1.7	SLF7032T-4R7M1R7-2
6.8	±20	1	0.041	1.6	SLF7032T-6R8M1R6-2
10	±20	1	0.053	1.4	SLF7032T-100M1R4-2
15	±20	1	0.075	1.1	SLF7032T-150M1R1-2
22	±20	1	0.11	0.96	SLF7032T-220MR96-2
33	±20	1	0.16	0.75	SLF7032T-330MR75-2
47	±20	1	0.24	0.67	SLF7032T-470MR67-2
68	±20	1	0.31	0.59	SLF7032T-680MR59-2
100	±20	1	0.45	0.45	SLF7032T-101MR45-2
150	±20	1	0.65	0.37	SLF7032T-151MR37-2
220	±20	1	1.05	0.29	SLF7032T-221MR29-2
330	±20	1	1.67	0.22	SLF7032T-331MR22-2
470	±20	1	2.05	0.2	SLF7032T-471MR20-2
680	±20	1	3.15	0.16	SLF7032T-681MR16-2
1000	±20	1	4.78	0.13	SLF7032T-102MR13-2

- Test equipment L:YHP 4194A IMPEDANCE GAIN/PHASE ANALYZER or equivalent (Measured at 1kHz/0.5V)  
Rdc:MATSUSHITA,VP-2941A DIGITAL MILLIOHM METER or equivalent

### TYPICAL ELECTRICAL CHARACTERISTICS

#### INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS

