


GW Bi-Color Type

Conventional Part No. Global Part No. Lighting Color
 LN2162C68 – (TR) LN162C3JRA Pure Green / Orange

■絶対最大定格 Absolute Maximum Ratings (T_a = 25°C)

Lighting Color	P _D (mW)	I _F (mA)	I _{FP} (mA)*	V _R (V)	T _{opr} (°C)	T _{stg} (°C)
Pure Green	45	15	60	3	-25 ~ +65	-30 ~ +75
Orange	45	15	60	3	-25 ~ +65	-30 ~ +75

*I_{FP}の条件は、duty 10%, Pulse width 1 msec. The condition of I_{FP} is duty 10%, Pulse width 1 msec

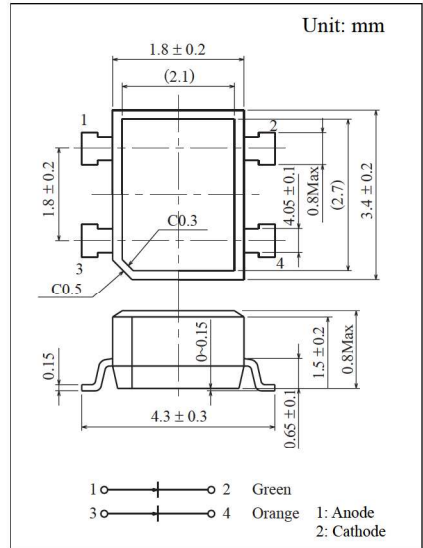

■電氣的・光学的特性 Electro-Optical Characteristics (T_a = 25°C)

Conventional Part No.	Lighting Color	Lens Color	I _O		I _F	V _F		λ _p	Δλ	I _F	I _R	
			Typ	Min		Typ	Max				Max	V _R
LN2162C68 – (TR)	Pure Green	Clear	2.5	1.2	10	2.05	2.8	555	25	10	10	3
	Orange		2.1	0.8	10	1.95	2.8	630	40	10	10	3
Unit	—	—	mcd	mcd	mA	V	V	nm	nm	mA	μA	V

